


Series 200 Blowers

209 • 211 • 213 • 215

Custom engineered systems to fit your needs, entire new systems or additions to your existing systems to expand or improve your up time.

Trim Collection Systems • Balers
Touch Screen & Motor Control Centers
Blowers & Fans • Cyclones

240 Airport Road • Gallatin, TN 37066
Phone (615) 230-9500 • Fax (615) 230-9592
Email: sales@gfpuhl.com • www.gfpuhl.com

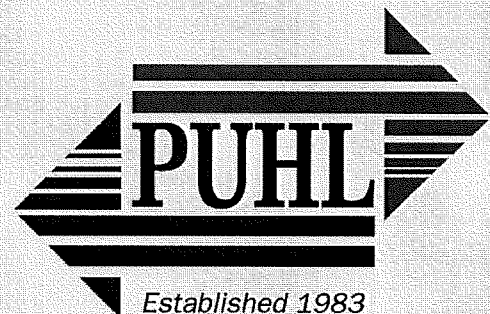


209

Inlet: 9" Diameter

Outlet Area: .51 sq. ft. Inside

Wheel Diameter: 15-5/8"

Wheel Circumference: 4.09 ft.

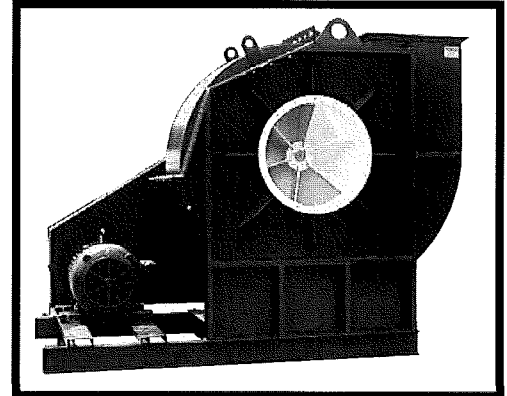

Underlined figures indicate maximum efficiency.


STATIC PRESSURE																					
CFM	OV	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
792	1800	1019	.23	<u>1307</u>	.43	1541	.62	1751	.81	1944	1.06	2123	1.30								
880	2000	1059	.26	<u>1336</u>	.46	1567	.68	1770	.92	1956	1.12	2131	1.41	2294	1.68						
968	2200	1102	.31	<u>1372</u>	.52	1598	.77	1793	1.00	1973	1.23	2145	1.54	2302	1.78	2444	1.94				
1056	2400	1146	.35	1409	.57	1629	.84	1820	1.09	1996	1.36	2163	1.68	2317	1.93	2450	2.05	2592	2.32	2728	2.67
1144	2600	1193	.41	1453	.68	<u>1663</u>	.91	1852	1.18	2025	1.51	2184	1.79	2335	2.08	2462	2.19	2601	2.50	2735	2.81
1232	2800	1241	.47	1488	.71	1700	1.01	1885	1.30	2056	1.65	2209	1.92	2356	2.24	2478	2.36	2617	2.69	2745	3.00
1320	3000	1290	.54	1532	.82	1737	1.09	<u>1921</u>	1.42	2087	1.75	2236	2.02	2381	2.37	2497	2.52	2631	2.89	2758	3.19
1408	3200	1340	.61	1579	.92	1777	1.21	1956	1.52	2121	1.89	2273	2.26	2408	2.54	2519	2.72	2647	3.02	2774	3.39
1496	3400	1392	.70	1625	1.03	1819	1.33	1995	1.66	2156	2.03	2303	2.38	2442	2.74	2545	2.92	2671	3.25	2793	3.61
1584	3600	1444	.79	1667	1.12	1860	1.44	2033	1.79	2191	2.17	<u>2339</u>	2.53	2475	2.95	2571	3.10	2698	2.49	2819	3.85
1672	3800	1498	.89	1716	1.24	1903	1.57	2074	1.97	2229	2.34	2376	2.69	2509	3.12	2607	3.35	2723	3.69	2842	4.08
1760	4000	1552	.99	1762	1.35	1948	1.72	2118	2.08	2268	2.51	2408	2.89	2542	3.29	2637	3.50	2756	3.90	2871	4.32
1848	4200	1608	1.11	1813	1.50	1993	1.87	2153	2.23	2307	2.68	2486	3.30	2579	3.52	2670	3.74	2788	4.13	2905	4.58
1936	4400	1663	1.26	1864	1.65	2034	2.02	2198	2.43	2348	2.87	2523	3.48	2613	3.72	<u>2704</u>	3.97	2823	4.40	2934	4.82
2024	4600	1719	1.37	1915	1.81	2087	2.24	2245	2.65	2389	3.07	2567	3.72	2654	3.98	2738	4.17	<u>2857</u>	4.65	2970	5.12
2112	4800	1779	1.56	1965	1.96	2134	2.37	2289	2.85	2429	3.23	2608	3.98	2693	4.23	2778	4.43	2890	4.89	<u>3004</u>	5.39

STATIC PRESSURE																							
CFM	OV	11" SP		12" SP		13" SP		14" SP		15" SP		16" SP		17" SP		18" SP		19" SP		20" SP		21" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1056	2400	2900	3.25	3018	3.56	3132	3.86	3259	4.49	3364	4.81	3465	5.14	3564	5.47	3660	5.80	3754	6.14	3845	6.48	3934	6.82
1144	2600	2921	3.51	3037	3.83	3150	4.16	3278	4.81	3382	5.16	3483	5.51	3581	5.86	3677	6.22	3770	6.57	3861	6.93	3949	7.28
1232	2800	2944	3.79	3059	4.12	3170	4.46	3299	5.15	3402	5.51	3502	5.88	3600	6.26	3695	6.63	3787	7.01	3877	7.38	3966	7.76
								3322	5.50	3424	5.88	3523	6.26	3620	6.65	3714	7.05	3806	7.45	3896	7.85	3983	8.25
1320	3000	2969	4.08	3083	4.43	3192	4.78																
1408	3200	2997	4.38	3109	4.75	3217	5.12	3348	5.87	3448	6.27	3546	6.67	3642	7.07	3735	7.48	3826	7.89	3915	8.31	4002	8.73
1496	3400	3026	4.69	3137	5.08	3244	5.48	3375	6.26	3475	6.67	3572	7.09	3666	7.51	3758	7.93	3848	8.36	3936	8.79	4022	9.22
1584	3600	3057	5.02	3167	5.43	3273	5.84	3404	6.65	3503	7.09	3599	7.52	3692	7.96	3783	8.40	3872	8.84	3959	9.21	4044	9.74
								3435	7.06	3533	7.52	3627	7.97	3720	8.43	3810	8.89	3898	9.35	3984	9.81	4069	10.28
1672	3800	3090	5.35	3198	5.78	3303	6.22																
1760	4000	3125	5.70	3232	6.15	3335	6.61	3467	7.48	3564	7.96	3657	8.43	3749	8.91	3838	9.39	3926	9.87	4011	10.35	4094	10.83
1848	4200	3161	6.07	3267	6.54	3368	7.01	3501	7.92	3596	8.41	3689	8.91	3779	9.41	3868	9.91	3954	10.41	4039	10.91	4122	11.41
1936	4400	3199	6.45	3303	6.94	3404	7.43	3537	8.37	3631	8.88	3722	9.40	3812	9.91	3899	10.43	3984	10.95	4068	11.48	4150	12.00
								3573	8.84	3666	9.37	3757	9.90	3845	10.44	3931	10.98	4016	11.52	4099	12.06	4180	12.60
2024	4600	3237	6.85	3340	7.36	3440	7.86																
2112	4800	3276	7.27	3378	7.79	3477	8.32	3611	9.33	3703	9.88	3793	10.43	3880	10.98	3965	11.54	4049	12.10	4131	12.66	4211	13.22
2200	5000	3316	7.71	3417	8.25	3515	8.79	3649	9.84	3740	10.41	3829	10.98	3916	11.55	4001	12.12	4083	12.69	4164	13.27	4244	13.85
2288	5200	3358	8.16	3458	8.72	3555	9.28	3688	10.37	3778	10.96	3867	11.54	3953	12.13	4037	12.72	4119	13.31	4199	13.91	4278	14.50
								3728	10.93	3818	11.53	3905	12.13	3991	12.73	4074	13.34	4155	13.95	4235	14.86		
2376	5400	3400	8.64	3499	9.22	3595	9.79																
2464	5600	3443	9.14	3541	9.73	3636	10.33	3769	11.50	3858	12.12	3944	12.74	4029	13.36	4112	13.99	4192	14.61	4271	15.24		
2552	5800	3487	9.66	3584	10.27	3678	10.88	3811	12.09	3899	12.73	3984	13.37	4068	14.01	4150	14.65	4230	15.30				
2640	6000	3531	10.21	3627	10.83	3720	11.46	3853	12.71	3940	13.36	4025	14.02	4108	14.68	4189	15.34	4269	16.00				
								3896	13.36	3983	14.02	4067	14.70	4149	15.37	4230	16.05	4308	16.73				
2728	6200	3575	10.78	3671	11.42	3764	12.06																
2816	6400	3620	11.38	3715	12.03	3807	12.69	3940	14.03	4026	14.71	4109	15.40	4191	16.09	4271	16.79						
2904	6600	3666	12.00	3760	12.67	3851	13.35																

Performance shown is for 200 series Fans with outlet ducts and with inlet ducts.
BHP shown does not include belt drive losses.

211

Inlet: 11" Diameter
Outlet Area: .64 sq. ft. Inside
Wheel Diameter: 19-1/8"
Wheel Circumference: 5.00 ft.

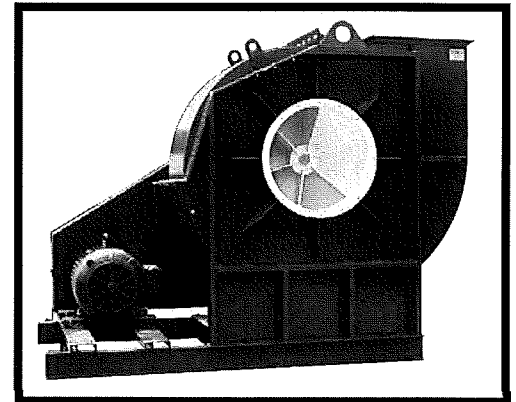

Underlined figures indicate maximum efficiency.


STATIC PRESSURE																					
CFM	OV	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1920	3000	1005	1.08	<u>1225</u>	<u>1.53</u>	1400	2.02	1560	2.52	1710	3.06	1850	3.61	1975	4.16	2095	4.72	2205	5.29	2315	5.89
2048	3200	1075	1.20	1260	1.70	1425	2.19	1585	2.75	1730	3.29	1865	3.86	1995	4.45	2110	5.03	2225	5.63	2330	6.23
2176	3400	1120	1.37	1295	1.88	1455	2.40	1610	2.97	1750	3.53	1885	4.13	2010	4.73	2125	5.33	2240	5.97	2345	6.59
2304	3600	1165	1.55	1330	2.06	1485	2.61	1635	3.20	1775	3.81	1905	4.42	2025	5.02	2145	5.67	2255	6.32	2360	6.96
2432	3800	1210	1.74	1370	2.28	1520	2.85	1660	3.44	1800	4.08	1925	4.71	2050	5.37	2160	6.00	2270	6.67	2375	7.35
2560	4000	1260	1.98	1410	2.52	1555	3.11	1690	3.71	1825	4.37	1945	5.01	2070	5.71	2185	6.40	2290	7.07	2395	7.78
2688	4200	1310	2.22	1450	2.76	1590	3.37	1720	4.00	1850	4.67	1975	5.37	2090	6.06	2200	6.74	2310	7.48	2410	8.19
2944	4600	1400	2.74	1540	3.36	1665	3.98	1790	4.66	1910	5.36	2025	6.08	2140	6.83	2245	7.57	2350	8.33	2450	9.11
3200	5000	1500	3.38	1625	4.01	1745	4.68	1865	5.41	1975	6.13	<u>2085</u>	<u>6.89</u>	2190	7.66	2295	8.47	2395	9.28	2495	10.2
3456	5400	1600	4.10	1720	4.80	1830	5.49	1940	6.24	2045	7.00	2150	7.80	<u>2250</u>	<u>8.62</u>	2350	9.46	2450	10.4	2540	11.2
3712	5800	1700	4.95	1810	5.65	1920	6.43	2020	7.19	2125	8.03	2220	8.84	<u>2315</u>	<u>9.68</u>	<u>2410</u>	<u>10.6</u>	2500	11.3	2595	12.5
3968	6200	1805	5.91	1910	6.67	2010	7.45	2110	8.29	2200	9.10	2295	9.97	2385	10.9	2475	11.7	2565	12.8	2650	13.7
4224	6600	1905	6.97	2005	7.77	2100	8.60	2195	9.47	2280	10.2	2375	11.3	2460	12.3	2545	13.1	2630	14.2	2715	15.2

STATIC PRESSURE																					
CFM	OV	12" SP		14" SP		16" SP		18" SP		20" SP		22" SP		24" SP		26" SP		28" SP		30" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
1920	3000	<u>2510</u>	<u>7.07</u>	2700	8.35	2870	9.63	3030	11.1	3180	12.4	3325	13.6	3465	15.3	3595	16.6	3720	18.0	3850	19.7
2048	3200	<u>2525</u>	<u>7.46</u>	<u>2710</u>	<u>8.76</u>	2880	10.1	3040	11.4	3190	12.8	3335	14.2	3475	15.7	3605	17.3	3735	18.8	3855	20.3
2176	3400	2540	7.87	<u>2725</u>	<u>9.21</u>	2895	10.5	3055	12.0	3205	13.3	3350	14.9	3485	16.4	3620	17.9	3750	19.6	3865	21.0
2304	3600	2560	8.32	2740	9.68	2910	11.2	3070	12.6	3220	14.1	3360	15.4	3500	17.1	3630	18.5	3755	20.1	3880	21.9
2432	3800	2570	8.73	2755	10.3	2920	11.5	3080	13.1	<u>3230</u>	<u>14.5</u>	3375	16.2	3515	17.6	3640	19.2	3770	21.0	3890	22.5
2560	4000	2585	9.18	2765	10.5	2935	12.0	3095	13.7	<u>3245</u>	<u>15.1</u>	<u>3390</u>	<u>16.9</u>	3525	18.4	3660	20.2	3785	21.9	3905	23.5
2688	4200	2605	9.68	2785	11.1	2955	12.8	3110	14.3	3260	15.9	3400	17.4	<u>3535</u>	<u>19.0</u>	3670	21.0	3795	22.6	3915	24.3
2944	4600	2640	10.8	2815	12.2	2985	14.0	3135	15.4	3285	17.1	3430	19.0	3565	20.6	3700	22.6	3820	24.1	3945	26.2
3200	5000	2680	11.9	2850	13.5	3015	15.2	3170	16.9	3320	18.8	3460	20.4	3600	22.5	3725	24.3	3850	26.1	3970	28.0
3456	5400	2720	13.0	2890	14.6	3050	16.5	3205	18.5	3350	20.3	3490	22.1	3620	23.9	3755	25.9	3880	28.1		
3712	5800	2765	14.2	2930	16.1	3090	18.0	3240	20.0	3390	22.0	3525	24.0	3655	25.9	3780	27.8	3905	29.8		
3968	6200	2815	15.5	2975	17.4	3135	19.7	3280	21.7	3420	23.6	3560	25.8	3690	27.8	3815	30.0	3940	32.0		
4224	6600	2870	17.0	3025	19.1	3175	21.1	3320	23.2	3460	25.4	3595	27.6	3720	29.7	3850	32.0	3970	34.3		

Performance shown is for 200 series Fans with outlet ducts and with inlet ducts.
 BHP shown does not include belt drive losses.

213

Inlet: 13" Diameter
Outlet Area: 91 sq. ft. Inside
Wheel Diameter: 22-5/8"
Wheel Circumference: 5.92 ft.

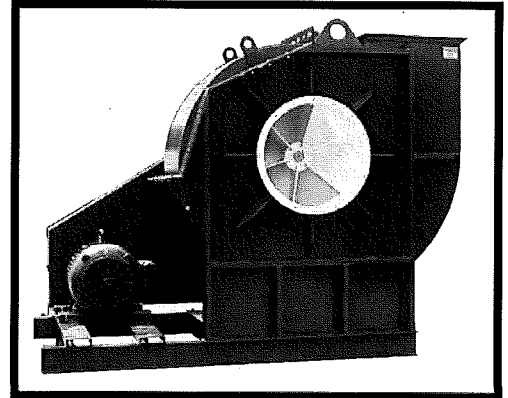

Underlined figures indicate maximum efficiency.


STATIC PRESSURE																					
CFM	OV	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2730	3000	905	1.54	1060	2.13	<u>1200</u>	<u>2.74</u>	1335	3.43	1455	4.12	1570	4.85	1675	5.59	1775	6.36	1875	7.18	1960	7.95
2912	3200	945	1.79	1090	2.37	<u>1225</u>	<u>3.02</u>	1355	3.72	1475	4.46	1585	5.20	1690	5.98	1790	6.79	1885	7.60	1975	8.44
3094	3400	985	2.04	1125	2.67	<u>1255</u>	<u>3.34</u>	1380	4.07	1495	4.81	1605	5.60	1705	6.39	1805	7.22	1900	8.08	1990	8.94
3276	3600	1025	2.33	1160	2.98	<u>1285</u>	<u>3.68</u>	1405	4.43	1515	5.20	1625	6.02	1725	6.84	1820	7.68	1915	8.57	2000	9.44
3458	3800	1065	2.63	1195	3.32	1315	4.05	<u>1430</u>	<u>4.81</u>	1540	5.62	1645	6.44	1745	7.31	1840	8.19	1930	9.09	2020	10.1
3640	4000	1110	3.0	1235	3.72	1350	4.46	1460	5.24	<u>1565</u>	<u>6.06</u>	1670	6.95	1765	7.80	1860	8.74	1950	9.66	2030	10.5
3822	4200	1150	3.36	1270	4.11	1385	4.90	1490	5.70	<u>1595</u>	<u>6.56</u>	1690	7.43	1790	8.36	1880	9.28	1965	10.1	2050	11.2
4186	4600	1240	4.25	1350	5.04	1455	5.88	1555	6.74	1650	7.62	<u>1745</u>	<u>8.57</u>	1835	9.52	1920	10.4	2010	11.6	2090	12.5
4550	5000	1325	5.25	1430	6.13	1530	7.02	1625	7.94	1715	8.88	1800	9.83	<u>1890</u>	<u>10.9</u>	1975	12.0	2050	12.8	2135	14.0
4914	5400	1415	6.43	1515	7.37	1605	8.32	1695	9.27	1785	10.4	1865	11.3	1945	12.3	<u>2025</u>	<u>13.3</u>	2105	14.6	2180	15.7
5278	5800	1505	7.78	1600	8.79	1685	9.80	1770	10.7	1850	11.8	1930	12.9	2010	14.1	2085	15.3	<u>2160</u>	<u>16.4</u>	2230	17.4
5642	6200	1595	9.30	1685	10.3	1770	11.6	1850	12.5	1925	13.7	2000	14.7	2075	16.0	2145	17.0	2215	18.2	<u>2290</u>	<u>19.6</u>
6006	6600	1685	11.0	1770	12.1	1850	13.3	1925	14.4	2000	15.5	2075	16.9	2140	17.9	2210	19.1	2280	20.6	2345	21.6

STATIC PRESSURE																					
CFM	OV	12" SP		14" SP		16" SP		18" SP		20" SP		22" SP		24" SP		26" SP		28" SP		30" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2730	3000	<u>2130</u>	<u>9.60</u>	2290	11.4	2435	13.2	2570	14.8	2705	17.0	2825	18.7	2945	20.8	3055	22.7	3170	25.1	3275	27.2
2912	3200	<u>2145</u>	<u>10.2</u>	<u>2300</u>	<u>12.0</u>	2445	13.7	2580	15.5	2710	17.5	2835	19.6	2950	21.5	3070	23.9	3175	25.8	3285	28.2
3094	3400	2155	10.7	<u>2310</u>	<u>12.5</u>	<u>2455</u>	<u>14.4</u>	2590	16.3	2720	18.3	2845	20.5	2960	22.4	3075	24.7	3180	26.7	3285	28.9
3276	3600	2170	11.4	2320	13.1	<u>2465</u>	<u>15.1</u>	<u>2605</u>	<u>17.2</u>	2730	19.1	2855	21.4	2975	23.5	3085	25.7	3195	28.0	3295	30.0
3458	3800	2185	12.0	2335	13.9	2480	16.0	<u>2615</u>	<u>18.0</u>	<u>2740</u>	<u>19.9</u>	2865	22.2	2980	24.3	3095	26.7	3200	28.8	3305	31.1
3640	4000	2195	12.4	2350	14.6	2490	16.6	2625	18.8	<u>2755</u>	<u>21.0</u>	<u>2875</u>	<u>23.1</u>	2990	25.2	3100	27.5	3210	29.9	3315	32.3
3822	4200	2210	13.2	2360	15.2	2505	17.5	2635	19.4	2760	21.6	<u>2885</u>	<u>24.0</u>	<u>3000</u>	<u>26.2</u>	<u>3115</u>	<u>28.7</u>	3220	30.9	3325	33.5
4186	4600	2245	14.6	2390	16.7	2535	19.2	2660	21.2	2790	23.7	2910	26.0	<u>3025</u>	<u>28.5</u>	<u>3135</u>	<u>30.9</u>	3245	33.5	3345	35.9
4550	5000	2285	16.3	2425	18.4	2565	21.0	2690	23.2	2815	25.6	2930	28.0	3050	30.7	3160	33.3	<u>3265</u>	<u>35.9</u>	<u>3365</u>	<u>38.5</u>
4914	5400	2325	18.0	2465	20.4	2600	22.9	2725	25.4	2845	27.9	2960	30.3	3075	33.0	3185	35.8	3290	38.5	3390	41.2
5278	5800	2370	19.9	2505	22.4	2635	25.0	2760	27.6	2875	30.0	2995	33.0	3100	35.4	3210	38.3	3315	41.3	3415	44.0
5642	6200	2420	21.9	2550	24.5	2675	27.1	2795	29.8	2915	32.7	3030	35.6	3135	38.3	3240	41.3	3345	44.3		
6006	6600	2475	24.2	2600	27.0	2720	29.6	2840	32.5	2955	35.5	3065	38.4	3170	41.3	3270	44.1	3375	47.4		

Performance shown is for 200 series Fans with outlet ducts and with inlet ducts.
 BHP shown does not include belt drive losses.

215

Inlet: 15" Diameter
Outlet Area: 1.21 sq. ft. Inside
Wheel Diameter: 26-1/8"
Wheel Circumference: 6.84 ft.

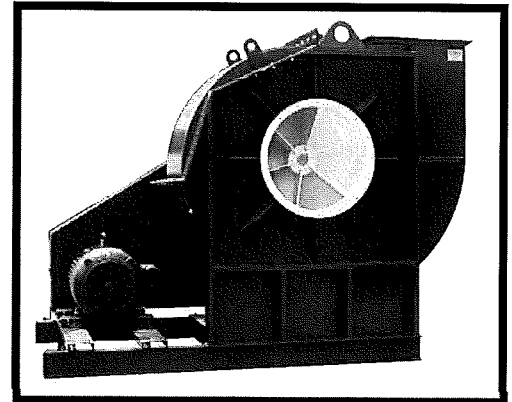

Underlined figures indicate maximum efficiency.

STATIC PRESSURE																					
CFM	OV	1" SP		2" SP		3" SP		4" SP		5" SP		6" SP		7" SP		8" SP		9" SP		10" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3630	3000	780	2.00	915	2.76	<u>1040</u>	<u>3.60</u>	1155	4.49	1260	5.41	1360	6.39	1450	7.36	1540	8.40	1620	9.41	1700	10.5
3872	3200	815	2.31	945	3.12	<u>1060</u>	<u>3.96</u>	1175	4.90	1275	5.85	1370	6.83	1465	7.88	1550	8.93	1635	10.1	1710	11.0
4114	3400	850	2.66	975	3.50	1090	4.39	1195	5.34	1295	6.33	1390	7.37	1480	8.43	1565	9.52	1645	10.7	1720	11.7
4356	3600	885	3.03	1005	3.91	1110	4.82	1215	5.80	1315	6.85	1405	7.90	1495	9.10	1575	10.0	1660	11.4	1735	12.6
4598	3800	920	3.44	1035	4.37	1140	5.33	1240	6.34	1335	7.40	1425	8.50	1510	9.63	1595	10.9	1670	11.9	1750	13.3
4840	4000	960	3.92	1070	4.87	1170	5.85	1265	6.90	<u>1355</u>	<u>7.98</u>	1445	9.14	1530	10.4	1610	11.6	1685	12.6	1760	14.1
5082	4200	995	4.41	1100	5.40	1195	6.41	1290	7.51	<u>1380</u>	<u>8.62</u>	<u>1465</u>	<u>9.80</u>	1545	10.9	1625	12.2	1700	13.4	1775	14.9
5566	4600	1070	5.55	1170	6.63	1260	7.73	1345	8.86	1430	10.1	1510	11.3	1590	12.6	1665	13.9	1735	15.1	1810	16.7
6050	5000	1145	6.88	1240	8.06	1320	9.19	1400	10.3	1485	11.8	1560	13.1	1635	14.4	1710	15.8	1775	17.0	1845	18.4
6534	5400	1225	8.46	1310	9.71	1390	11.0	1465	12.2	1540	13.5	1615	15.0	1680	16.2	<u>1755</u>	<u>17.8</u>	1820	19.2	1885	20.5
7018	5800	1300	10.1	1380	11.5	1460	13.0	1530	14.2	1600	15.6	1670	17.1	1740	18.6	1805	20.1	1870	21.6	1930	23.0
7502	6200	1380	12.4	1455	13.6	1530	15.2	1600	16.6	1665	18.0	1730	19.6	1795	21.1	1855	22.5	1920	24.2	1980	25.9
7986	6600	1460	14.6	1530	16.0	1600	17.6	1665	19.2	1730	20.7	1790	22.1	1855	23.9	1910	25.2	1970	27.0	2030	28.8

STATIC PRESSURE																					
CFM	OV	12" SP		14" SP		16" SP		18" SP		20" SP		22" SP		24" SP		26" SP		28" SP		30" SP	
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
3630	3000	<u>1845</u>	<u>12.6</u>	1980	14.9	2110	17.4	2225	19.7	2340	22.2	2450	25.0	2550	27.6	2650	30.4	2745	33.1	2835	36.0
3872	3200	1855	13.3	<u>1990</u>	<u>15.7</u>	2120	18.3	2235	20.8	2350	23.4	2455	25.9	2560	28.7	2655	31.5	2750	34.3	2840	37.2
4114	3400	1865	14.0	2000	16.6	<u>2125</u>	<u>19.1</u>	2245	21.7	2355	24.2	2465	27.1	2565	29.8	2665	32.8	2760	35.7	2850	38.6
4356	3600	1875	14.8	2010	17.3	2135	19.9	<u>2255</u>	<u>22.7</u>	2365	25.4	2470	28.1	2570	30.8	2670	33.8	2765	36.9	2855	39.8
4598	3800	1890	15.8	2020	18.2	2145	20.9	2265	23.8	<u>2375</u>	<u>26.6</u>	2480	29.2	2580	32.1	2680	35.3	2770	38.1	2865	41.5
4840	4000	1900	16.5	2035	19.3	2155	21.9	2275	24.9	<u>2385</u>	<u>27.7</u>	<u>2490</u>	<u>30.6</u>	2590	33.6	2690	36.6	2780	39.7	2870	42.9
5082	4200	1915	17.5	2045	20.1	2170	23.1	2285	25.9	2395	28.9	2500	31.9	2600	34.9	2695	37.9	2790	41.2	2880	44.4
5566	4600	1945	19.4	2070	22.1	2190	25.2	2305	28.1	2415	31.2	2520	34.5	2620	37.7	2715	41.0	2805	44.1	2895	47.5
6050	5000	1975	21.3	2100	24.4	2220	27.7	2330	30.7	2440	34.1	2540	37.2	2640	40.6	2735	44.1	2825	47.4	2915	51.0
6534	5400	2010	23.6	2130	26.8	2250	30.3	2360	33.6	2465	36.9	2565	40.4	2660	43.6	2755	47.3	2845	50.9	2935	54.5
7018	5800	2050	26.1	2165	29.4	2280	32.9	2390	36.5	2490	39.8	2590	43.5	2685	47.0	2780	50.9	2870	54.5	2955	58.3
7502	6200	2095	29.1	2210	32.6	2315	35.9	2420	39.6	2520	43.2	2620	47.0	2715	50.8	2805	54.5	2890	58.3	2980	62.5
7986	6600	2140	32.1	2250	35.7	2355	39.3	2455	43.1	2560	47.0	2650	50.6	2745	54.7	2835	58.7	2920	62.6		

Performance shown is for 200 series Fans with outlet ducts and with inlet ducts.
 BHP shown does not include belt drive losses.